

200% MAX. LOAD CAPACITY



70% on road
30% off road




200%
Max. Load
Capacity

SUPER AM S




Better heavy load capacity

Super-stiffy Design

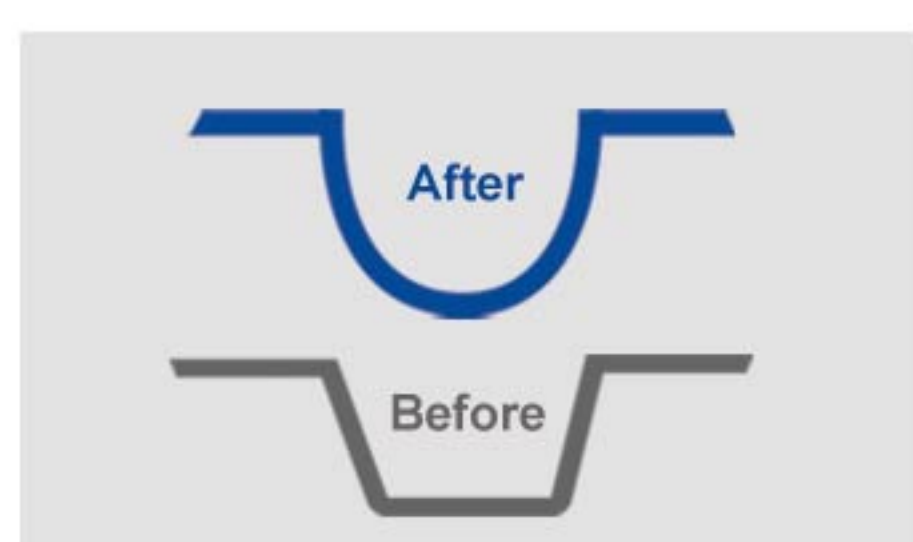

Better protection for avoiding groove puncture

Arc Groove Design

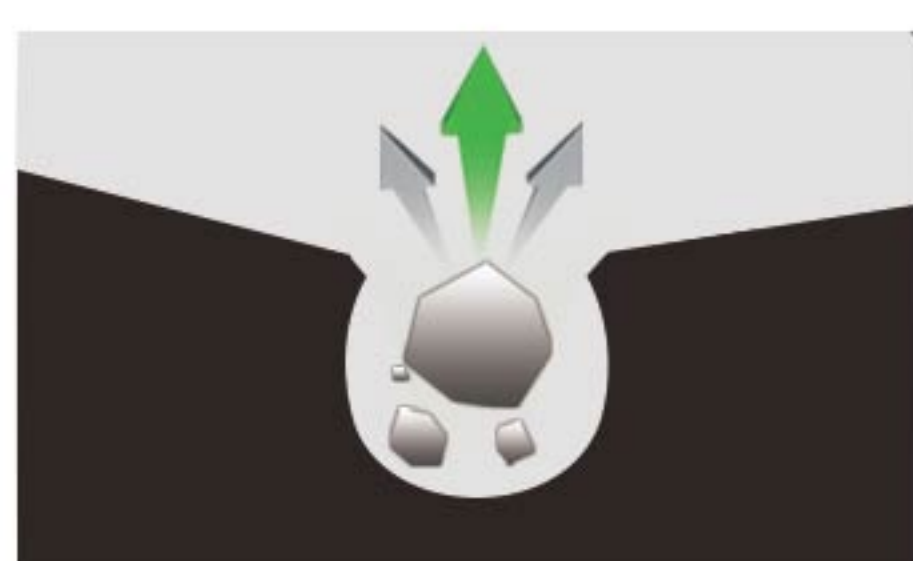

Self-cleaning Design

Size	PR	Tread Depth (mm)	LI & SS	Load Capacity (kg)		Max. Load Capacity (kg)	Standard Pressure (kPa)	Type
				Single	Dual			
10.00R20	16	16	146/143K	3000	2725	6000	830	TT
10.00R20	18	16	149/146K	3250	3000	6000	930	TT
11.00R20	16	17	150/147L	3350	3075	6500	830	TT
11.00R20	18	17	152/149L	3550	3250	6500	930	TT